




Taha Impex

Authorized Dealer & Trusted Supplier of
Narrow Fabric Machinery

**NARROW FABRIC
MACHINERY**

www.tahaimpex.com

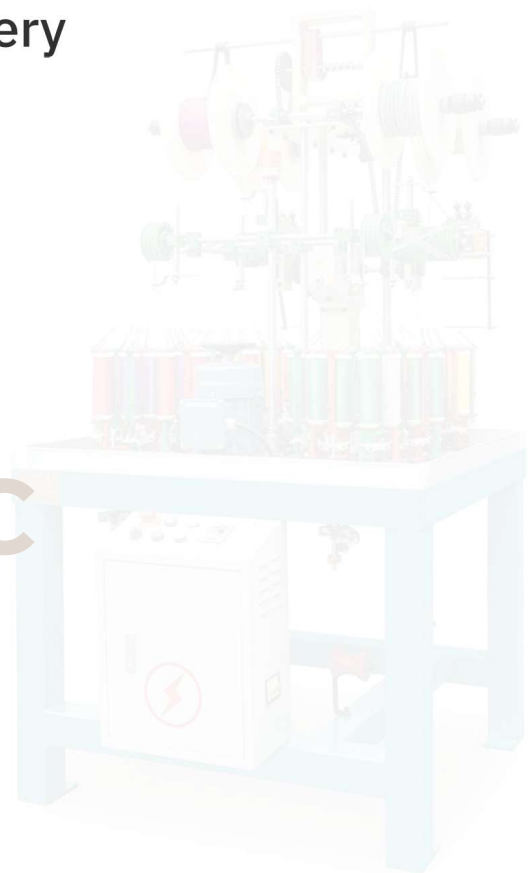

About Taha Impex

TWO DECADES OF DRIVING TEXTILE INNOVATION

Taha Impex – Trusted Dealer in Narrow Fabric Machinery

Established in 2003 and registered office in Surat, Gujarat – India's textile capital and the "Silk City" – Taha Impex is a trusted authorized dealer and supplier in the textile industry. With over two decades of experience and expertise, we have built a strong reputation for reliability and excellence in the textile machinery sector.

Taha Impex is ISO 9001:2015 Certified Co into manufacturing & Import of Narrow Fabrics Machineries since 2004.

We are Agents of Brand " **JINGYI** " "**HENGHUI**" & "**PRINISH**"

We are supplying High speed Needle looms , Crochet's & Braiding machines.

Also supplying Ancillary Machines like Warping, Finishing, Festooning, Layering & Rolling Machines.



- ◆ Crochet Machines
- ◆ Needle Loom Machines



- ◆ Braiding Machines



- ◆ Needle Loom Machines



- ◆ Ancillary Machines
- ◆ Spare Parts

OUR CERTIFICATIONS

Authorized. Certified. Trusted.

At Taha Impex, we don't just meet expectations – we're officially certified to exceed them. Our credentials reflect our commitment to quality, reliability, and trust across the textile industry.





Braiding Machines



Garments Accessories

Advantages :

This machine is reasonable in design, small in area, convenient in operation, large in capacity of bobbin, high in output, adjustable in pitch (gear or servo motor). Machine has auto-stop motion, inverter has various functions, can count meters, adjust speed, set current protection, record production time, and set output. This machine can be equipped with rubber feeder, cross winding system, or spool packing system. All machines accept OEM.

Application :

Garments accessories braiding machine is applied for the production of round & flat shoelace, elastic cord & lace, flat lace, zigzag lace, piping cord, double color cord, triangular cord, square cord, quadrangular cord, and multicolor lace for national costume, etc.

Material use :

PP, Polyester, PE, HDPE, Cotton, Nylon, Dyneema, etc.



KBL-90-16-4



KBL-90-17-4



**KBL-90-16-4
(Square Type)**


KBL-90-33-2

KBL-90-25-2


KBL-90-48-2

Model	Heads	Carries	Max.rpm. horngear	Motor Power kW	Bobbin size
KBL-5-2-162	2	5	150	0.75	A 13
KBL-7-2-120	2	7	280	0.55	A 04
KBL-9-4-80	4	9	360	0.55	A 01
KBL-9-4-90	4	9	300	0.55	A 04
KBL-9-8-80	8	9	360	1.1	A 01
KBL-9-8-90	8	9	300	1.1	A 04
KBL-11-8-80	8	11	360	0.75	A 01
KBL-11-8-90	8	11	300	0.75	A 04
KBL-12-4-80	4	12	360	0.55	A 01
KBL-12-4-90	4	12	300	0.55	A 04
KBL-13-2-80	2	13	360	0.55	A 01
KBL-13-2-90	2	13	300	0.55	A 04
KBL-13-2-130	2	13	242	0.75	A 13
KBL-13-4-80	4	13	360	0.55	A 01
KBL-13-4-90	4	13	300	0.55	A 04
KBL-16-4-80	4	16	360	0.75	A 01
KBL-16-4-90	4	16	300	0.75	A 04
KBL-16-2-80	2	16	360	0.37	A 01
KBL-16-2-90	2	16	300	0.37	A 04
KBL-17-2-80	2	17	360	0.55	A 01
KBL-17-2-90	2	17	300	0.55	A 04
KBL-17-2-130	2	17	242	0.75	A 13
KBL-17-4-80	4	17	360	0.75	A 01
KBL-17-4-90	4	17	300	0.75	A 04
KBL-20-4-80	4	20	360	0.75	A 01
KBL-20-4-90	4	20	300	0.75	A 04
KBL-21-2-80	2	21	360	0.55	A 01

Model	Heads	Carries	Max.rpm. horngear	Motor Power kW	Bobbin size
KBL-21-2-90	2	21	300	0.55	A 04
KBL-21-4-80	4	21	360	0.75	A 01
KBL-21-4-90	4	21	300	0.75	A 04
KBL-24-2-80	2	24	360	0.55	A 01
KBL-24-2-90	2	24	300	0.55	A 04
KBL-25-2-80	2	25	360	0.55	A 01
KBL-25-2-90	2	25	300	0.55	A 04
KBL-25-4-80	4	25	360	0.75	A 01
KBL-25-4-90	4	25	300	0.75	A 04
KBL-25-2-110	2	25	230	0.75	A 07
KBL-25-2-130	2	25	242	0.75	A 13
KBL-26-2-90	2	26	300	0.55	A 01/04
KBL-26-2-100	2	26	288	0.55	A 01/04
KBL-27-2-90	2	27	300	0.55	A 01
KBL-28-2-110	2	28	230	0.55	A 01
KBL-29-2-80	2	29	360	0.55	A 01
KBL-29-2-90	2	29	300	0.55	A 04
KBL-29-2-110	2	29	230	0.75	A 01
KBL-32-2-80	2	32	360	0.75	A 01
KBL-32-2-90	2	32	300	0.75	A 04
KBL-33-2-80	2	33	360	0.75	A 01
KBL-33-2-90	2	33	300	0.75	A 04
KBL-36-2-80	2	36	360	0.75	A 01
KBL-36-2-90	2	36	300	0.75	A 04
KBL-36-2-110	2	36	230	0.75	A 01
KBL-37-2-80	2	37	360	0.75	A 04
KBL-37-90	1	37	300	0.75	A 01

Model	Heads	Carries	Max.rpm. horngear	Motor Power kW	Bobbin size
KBL-37-100	1	37	288	0.55	A 01
KBL-37-2-90	2	37	300	0.75	A 01
KBL-39-100	1	39	288	0.55	A 01
KBL-40-80	1	40	360	0.75	A 01
KBL-40-90	1	40	300	0.75	A 04
KBL-40-2-80	2	40	360	0.75	A 01
KBL-40-2-90	2	40	300	0.75	A 04
KBL-41-80	1	41	360	0.75	A 01
KBL-41-90	1	41	300	0.75	A 04
KBL-41-110	1	41	230	0.55	A 07
KBL-44-80	1	44	360	0.75	A 01
KBL-44-90	1	44	300	0.75	A 04
KBL-44-2-90	2	44	300	0.75	A 01
KBL-45-90	1	45	300	0.55	A 04
KBL-46-2-90	2	46	300	0.75	A 04
KBL-47-90	1	47	300	0.55	A 04
KBL-47-110	1	47	230	0.55	A 07
KBL-48-80	1	48	360	0.75	A 01
KBL-48-90	1	48	300	0.75	A 04
KBL-48-100	1	48	288	0.75	A 01
KBL-48-2-80	2	48	360	0.75	A 01
KBL-48-2-90	2	48	300	0.75	A 04
KBL-49-90	1	49	300	0.55	A 04
KBL-49-110	1	49	230	0.55	A 07
KBL-52-100	1	52	288	0.75	A 01
KBL-52-2-110	2	52	230	0.75	A 04
KBL-53-90	1	53	300	2*0.55	A 04

Model	Heads	Carries	Max.rpm. horngear	Motor Power kW	Bobbin size
KBL-56-100	1	56	288	0.75	A 01
KBL-57-90	1	57	300	2*0.55	A 04
KBL-65-90	1	65	300	2*0.55	A 04
KBL-75-90	1	75	300	2*0.55	A 04
KBL-77-100	1	77	288	2*0.55	A 01
KBL-81-90	1	81	300	2*0.55	A 04
KBL-105-90	1	105	300	2*0.55	A 01
KBL-106-100	1	106	288	2*0.55	A 01

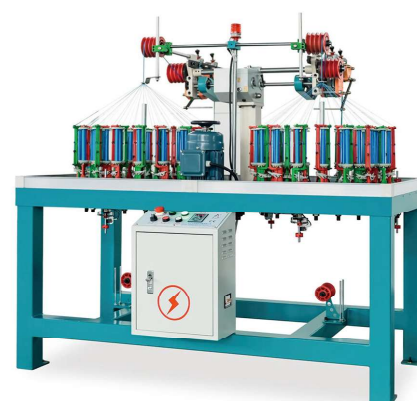
KBL-90-32-2


Belt Machine


**8 carriers Round Type
Braidier**

**TBL-3 long 3 Spindle
Braiding Machine**




KBL-180-3-2



KBL-204-9-2



KBL-204-17-1



KBL-180-15-1



KBL-204-24-1



Solid Rope/Spiral Rope

Advantages:

Solid cord braiding machine, also called spiral cord braiding machine, Henghui has many types of such machines, so the customer can select the proper machine according to their requirements. The main parts of the machine are heat-treated to get high hardness and long service life. The machine has fast speed, large volume of bobbin capacity, sensitive auto-stop motion, and it can be operated 24 hours per day.



KBL-168-18-1


Application:

Mainly suitable for soldiers rope, the rope for military use, fitness rope, traction rope, sports ropes, flag rope, start rope for grass cutter.

Material use:

PP, Polyester, PE, HDPE, Cotton, Nylon, Dyneema, etc.

Model	Heads	Carries	Max.rpm.horngear	Motor Power kW	Bobbin size
KBL9-8-90	8	9	300	1.1	A 01
KBL-9-2-90	2	9	300	0.55	A 04
KBL-12-4-90	4	12	300	0.75	A 04
KBL-12-4-120	4	12	210	1.1	A 01
KBL-12-2-90	2	12	300	0.55	A 04
KBL-12-2-110	2	12	230	0.75	A 01
KBL-12-2-120	2	12	210	0.75	A 01
KBL-12-2-130	2	12	242	0.75	A 01
KBL-12-130	1	12	242	0.75	A 01
KBL-12-168	1	12	158	0.75	A 01
KBL-18-110	1	18	230	0.75	A 01



Model	Heads	Carries	Max.rpm. horngear	Motor Pow- er kW	Bobbin size
KBL-18-130	1	18	242	0.75	A 01
KBL-18-168	1	18	158	1.1	A 01
KBL-20-110	1	20	230	0.75	A 01
KBL-20-130	1	20	242	0.75	A 01



Rope / Cordage

Advantages:

This machine is reasonable in design, small in area, convenient in operation, large in capacity of bobbin, high in output, adjustable in pitch (gear or servo motor). Machine have auto-stop motion, Inverter has various functions, can count meters, adjust speed, set current protection, record production time and set output. This machine can be equipped with rubber feeder or cross winding system or spool packing system. All machines accept OEM.



KBL-168-24-1

Application:

Mainly suitable for braiding climbing rope, safety rope, bungee cord, soldiers rope, the rope for military, trailer rope, fitness rope, rope for tent, traction rope, sports rope, clothes line, etc.

Material use:

PP, Polyester, PE, HDPE, Cotton, Nylon, Dyneema, etc.

Model	Heads	Carries	Max.rpm. horngear	Motor Power kW	Bobbin size
KBL-8-300	1	8	78	0.75	A 17
KBL-8-2-140	2	8	192	0.75	A 11
KBL-8-2-168	2	8	158	0.75	A 13
KBL-8-2-224	2	8	108	1.1	A 17



Model	Heads	Carries	Max.rpm. horngear	Motor Power kW	Bobbin size
KBL-8-2-300	2	8	83	1.1	A 18
KBL-12-4-120	4	12	210	1.1	A 11
KBL-12-2-120	2	12	210	0.75	A 11
KBL-12-2-130	2	12	242	0.75	A 13
KBL-12-2-168	2	12	154	0.75	A 17
KBL-12-224	1	12	108	1.1	A 18
KBL-12-300	1	12	83	1.1	A 13
KBL-16-4-120	4	16	210	1.5	A 11
KBL-16-2-120	2	16	210	1.1	A 13
KBL-16-2-130	2	16	242	1.1	A 11
KBL-16-2-168	2	16	154	1.1	A 17
KBL-24-168	1	24	154	1.1	A 17
KBL-24-224	1	24	108	2*0.75	A 18
KBL-24-2-120	2	24	210	1.1	A 11
KBL-24-2-130	2	24	242	1.5	A 11
KBL-32-2-120	2	32	210	1.5	A 11
KBL-32-2-130	2	32	242	1.5	A 13
KBL-32-120	1	32	210	0.75	A 11
KBL-32-130	1	32	242	0.75	A 13
KBL-32-168	1	32	158	1.1	A 17
KBL-36-120	1	36	210	2*0.55	A 11
KBL-36-130	1	36	242	2*0.55	A 13
KBL-36-168	1	36	154	2*0.55	A 17
KBL-40-130	1	40	158	2*0.55	A 13
KBL-48-120	1	48	210	2*0.55	A 11
KBL-48-130	1	48	242	2*0.55	A 13
KBL-48-168	1	48	154	2*0.75	A 17



Double layers

Advantages:

Main features: convenient, high efficiency, braider is closer, stronger sense of tension or higher.

Products based on the high-end market, must possess high quality of the parts;

The first extensive use of alloy material, physical properties and mechanical properties.

Can produce different specifications according to requirements.



KBL-130-32/24-1

Application:

Braiding layer of cable, high-pressure hose, safety rope, hoisting rope, sports ropes, etc.

Material use:

Nylon, Dyneema, PP, Polyester, aramid.


Model	Heads	Carries	Max.rpm.horngear	Motor Power kW	Bobbin size
KBL-48/56-90	2	48/56	300	0.55*3	A 04
KBL-16/16-130	2	16/16	160	0.75*3	A 13
KBL-32/16-130	2	32/16	160	0.75*3	A 13
KBL-32/24-130	2	32/24	160	0.75*3	A 13
KBL-16/24-130	2	16/24	160	0.75*3	A 13
KBL-20/24-130	2	20/24	160	0.75*3	A 13
KBL-24/24-130	2	24/24	160	0.75*3	A 13
KBL-32/32-140	2	32/32	160	0.75*3	A 13
KBL-20/24-140	2	20/24	200	1.5*2	A 13
KBL-48/48-140	2	48/48	200	1.5*2	A 13
KBL-16/16-140	2	16/16	155	1.5*2	A 13



Wire Harness

Advantages:

With a fully enclosed cover to ensure safe operation of workers. The foot pedal control switch can be used to keep on and off. The reel can be converted by the adjustment switch, and the braided joint can be hidden. The 120 series wire harness braiding machine is suitable for braiding wiring harness materials directly.

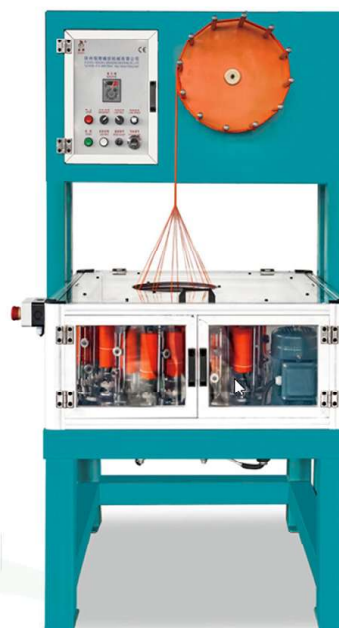


KBL-120-24-1

Application:

These series machines are mainly for the production of automotive wiring harness, special vehicles wiring harness, aircraft wiring harness, wiring harness of aeronautics and astronautics, etc.


Material use:

Nylon, PE, PET, Dyneema, UHMWPE, etc.



Model	Heads	Carries	Max.rpm. horn gear	Motor Power kW	Bobbin size
KBL-24-110	1	24	230	0.75	A 07
KBL-32-110	1	32	230	0.75	A 07
KBL-40-110	1	40	230	0.75	A 07
KBL-48-110	1	48	230	0.75	A 07
KBL-16-120	1	16	210	0.75	ID 16/140mm
KBL-24-120	1	24	210	1.1	ID 16/140mm
KBL-32-120	1	32	210	1.1	ID 16/140mm
KBL-40-120	1	40	210	1.1	ID 16/140mm
KBL-48-120	1	48	210	0.55*2	ID 16/140mm

String / Threads

**KBW-90-16-1****KBW-90-24-1****KBW-90-16-1**

Model	KBW-90-16-1	KBL-90-16-1	KBL-90-24-1
Dimensions (mm)	1490 × 610 × 1580	1050 × 610 × 1822	1186 × 846 × 1756
Weight	450 KG	—	—
Heads	1	—	—
Bobbin Size	φ40mm × φ30mm × 26mm	φ40 × 30 × 26	φ40 × 26
Horn gear Speed	0–350 rpm	350 rpm	286 rpm
Spindle Speed	0–87.5 rpm	—	—
Motor	0.77 kW (Braider 0.25kW + Traction 0.4kW + Take-up 0.12kW)	1.55 kW	0.77 kW
Power Supply	Single phase 220V ±10%, 50Hz	—	—
Traction	Caterpillar	—	—
Take-up	Open-loop servo tension winding	—	—
Pay-off	Open-loop hysteresis tension pay-off	—	—
Noise Level	Operation noise does not exceed 80 dB	—	—
Braiding Material	Stainless steel wire, nickel-titanium wire, fibre wire, etc	—	—
Braiding Density	0–300PPI Adjustable	—	—
Braiding Diameter	Core 0.5–φ12.0mm (braiding, guiding, etc.)	—	—
Braiding Pattern	1×1 (Carriers/2), 1.5×2, 2×2	—	—

Wire & Cable

Advantages:

Features: The braiding machinery is functional, including meter counter, auto stop motion, recording, motor overload protection during production, and can braid with a variety of materials by replacing the spindles. Multiple configurations are available and can be customized to meet a wide range of braiding needs. Various yarns, fiberglass, carbon fiber, asbestos, graphite, and various composite materials.



KBL-224-96-1

Application:

These series machines are mainly for braiding: communications cable, signal cable, USB cable, high temperature wire, insulation wire, iron wire, special cable, Rice cooker power cable, conduction band, shielded cable, control cable, shielding layer of cable, coaxial cable, etc.

Material use:

Copper, aluminum, magnesium wire, tin wire, stainless steel wire and other metal material. PP, PE, Fiberglass, Carbon fiber, cotton yarn, nylon, monofilament, etc.

Model	Heads	Carries	Max.rpm. horngear	Motor Power kW	Bobbin size
KBL-8-300	1	8	83	0.75	A18
KBL-8-2-140	2	8	193	0.75	A11
KBL-8-2-160	2	8	158	0.75	A09
KBL-8-2-224	2	8	108	1.1	A18
KBL-8-2-300	2	8	83	1.1	A18
KBL-12-4-80	4	12	360	0.55	A01/04
KBL-12-4-90	4	12	300	0.55	A01/05
KBL-12-160	1	12	158	1.1	A14
KBL-12-224	1	12	108	1.1	A18

Model	Heads	Carries	Max.rpm. horngear	Motor Power kW	Bobbin size
KBL-16-4-80	4	16	360	0.75	A01/04
KBL-16-4-90	4	16	300	0.75	A01/05
KBL-16-2-110	2	16	230	0.75	A09
KBL-16-2-120	2	16	218	0.75	A09
KBL-16-160	1	16	158	0.75	A11
KBL-16-224	1	16	108	0.75	A18
KBL-24-4-80	4	24	360	0.55	A01/04
KBL-24-4-90	4	24	300	0.55	A01/05
KBL-24-2-110	2	24	230	0.75	A09

Model	Heads	Carries	Max.rpm. horngear	Motor Power kW	Bobbin size
KBL-24-120	1	24	210	0.75	A11
KBL-24-160	1	24	158	0.75	A18
KBL-24-168	1	24	154	0.75	A18
KBL-24-224	1	24	108	2*0.75	A18
KBL-32-2-80	2	32	360	0.75	A01/04
KBL-32-2-90	2	32	300	0.75	A01/05
KBL-32-110	1	32	230	0.55	A09
KBL-32-120	1	32	210	0.75	A09
KBL-32-160	1	32	158	1.1	A11
KBL-32-224	1	32	108	1.1	A 18
KBL-40-80	1	40	360	0.75	A 01/04
KBL-40-90	1	40	300	0.75	A 01/05
KBL-40-110	1	40	230	2*0.55	A 09
KBL-40-224	1	40	108	0.75	A 13
KBL-40-2-80	2	40	360	0.75	A 01/04
KBL-40-2-90	2	40	300	0.75	A 01/05
KBL-44-80	1	44	360	0.75	A 01/04
KBL-44-90	1	44	300	0.75	A 01/05
KBL-48-80	1	48	360	0.75	A 01/04
KBL-48-90	1	48	300	0.75	A 01/05
KBL-48-110	1	48	230	2*0.37	A 09
KBL-48-120	1	48	210	2*0.75	A 13
KBL-48-160	1	48	158	2*0.75	A 18
KBL-48-224	1	48	108	3*0.55	A 18
KBL-48-2-80	2	48	360	1.1	A 01/04
KBL-48-2-90	2	48	300	1.1	A 01/05



Rubber Hose

Advantages:

This series high speed machines' core components (horngear, spindle-foot), use high technology into the rare metal trace elements, greatly improving its working life, wear-resisting, durable, no corrosion.

Application:

This series machines are applied to the produce: water hose, shower hose, stainless steel high-pressure hose, irrigation pipe, and other kinds high pressure pipe, etc.


Material use:

Nylon, fiber yarn, fiber glass, stainless steel wire, copper wire, etc.



KBL-90-72-1

Model	Heads	Carries	Max.rpm. horngear	Motor Power kW	Bobbin size
KBL-16-4-80(90)	4	16	360(300)	0.75(1.1/1.5)	A 01(04/05)
KBL-16-2-110(120.130)	2	16	230(210.242)	0.37/0.55	A 07(11/13)
KBL-24-4-80(90)	4	24	360(300)	0.55 (0.75/1.1/1.5)	A 01(04/05)
KBL-24-2-110(120.130)	2	24	230(210.242)	0.55 (0.75/1.1/1.5)	A 07(11/13)
KBL-24-120(160)	1	24	210(158)	0.75/0.55*2	A 11/14
KBL-32-2-80(90)	2	32	360(300)	0.75/1.5	A 01(04/05)
KBL-32-110(120.130)	2	32	230(210.242)	0.55(0.75/1.1)	A 07(11/13)
KBL-32-160	1	32	158	1.1	A 14
KBL-36-2-80(90)	2	36	360(300)	0.75	A 01(04/05)
KBL-36-110(120.130)	2	36	230(210.242)	0.75/0.55*2	A 07(11/13)
KBL-36-160	1	36	158	0.75*2	A 14
KBL-40-110(120.130)	1	40	230(210.242)	0.75/0.55*2	A 07(11/13)
KBL-40-2-80(90)	2	40	360(300)	0.75	A 01(04/05)
KBL-48-80(90.110)	1	48	360(300.230)	0.75zzz (0.55*2/0.75*2)	A01(04/05/07)
KBL-48-120(130.160)	1	48	210(242.158)	0.75*2	A 14
KBL-48-2-80(90)	2	48	360(300)	0.75	A 01(04/05)



BSJ-2AWMC Automatic winding machine with HMI and meter counter

2-Head 90# Fully Automatic Winding Machine



Function	Details	Configuration	YES/NO
Bobbin size	A04 bobbin Φ47×Φ13×139mm	Frequency inverter	YES
Motor	0.425kw	Speed adjust	YES
Dimension	1000×800×1200mm	Bobbin holder	YES
Weight	150 kgs	Heating wire cutting	YES
HS CODE	844590	Counter	YES
Voltage	220V/380V/440	Traverse speed	10-100RPM
Spindle speed	0-3400RPM	12P automatic stop motion	YES
Operation way	Buttons		
Yarn size	100D-3000D		
Controller	Mitsubishi PLC		

FXJ-12 Pay-off

12-Head Tension Pay-off Stand



BSJ-2AL Simple Type Automatic Winding Machine

2-Head 130# Fully Automatic Winding Machine





Semi Automatic Tipping Machine

Description	Braids	Details of Machine
HH-T semi tipping machine	shoelace	Any length Production close to automatic after worker's experience. 950*780*1330mm 230kg 0.75kw
HH-TE semi tipping machine	shoelace or rope handles	Any length Production close to automatic after worker's experience. 950*780*1330mm 260kg 0.75kw

PLC automatic tipping machine

With rubber lace feeder and shoelace collection device



Description	Braids	Details of Machine
HH-T-100 tipping machine	shoelace or rope handles	For tipping 0.35-0.9 meters cords 1890*1240*1680mm 350kg 1.85kw
HH-T-160 tipping machine	shoelace or rope handles	for tipping 0.35-1.5 meters cords 2300*1150*1680mm 450kg 1.85kw

Contact Us



Office Address :

202, JASH INFINITY, OPP. SANDESH PRESS, NEAR SUB JAIL, KHATODRA,
SURAT-395 002 (GUJ.) INDIA.

Tel. No. +91 261 4827576, **Cell:** +91 98251 61123, +91 97255 52220

Website: www.tahaimpex.com

E-mail: sales@tahaimpex.com, info@tahaimpex.com

